

Job Name:	
Submitted By:	



Submittal Sheet For:

YN030GLSI24M3G / (3x) RT0xxGLSILCFHG

Date _____

Ref. _____

Triple (3) Circuit Ducted Inverter Heat Pump Set

System Full Set Model: **YN030GLSI24M3G**

AHRI Reference Number: **217048773**

Cooling Mode Performance

Rated Cooling	27,000 BTU/hr
Ambient Range	5~131°F
SEER2 Rating	22.0 BTU/W·h
EER2 Rating	12.0 BTU/W·h

* 100% Capacity @ Indoor DB 80°F / WB 67°F

Heating Mode Performance

Rated Heating	27,000 BTU/hr
Ambient Range	-13~86°F
HSPF2 IV (V)	9.0 (7.8) BTU/W·h
COP (47°F)	3.4 (W/W)

* High Heat (47°F) = 27,000 BTU / Low Heat (17°F) = 19,500 BTU / COP (5°F) = 1.9



Ceiling-Concealed Ducted Indoor Unit

Outdoor Condensing Unit



User-Selected Installation Kit



Handheld Remote Controller

Electrical Information

Rated Input (W)	Cooling	Heating
	2,160	2,080
Rated Current (A)	9.7	9.3
Breaker Needed	30A (Double-Pole)	
Power Supply	208~230V, 1Ph, 60Hz	

Piping and Refrigerant

Liquid Line (OD)	1/4 in (3)
Suction Line (OD)	3/8 in (3)
Refrigerant Precharge	R-454b(Supports 10-25ft.)
Vertical Run/Elevation Diff.	50 ft. / 33 ft.

This combination is
Energy-Star certified.




Exterior Unit (Condenser) Specifications



Sound Level (dBA)	62
Recommended Room Size	400~1,050 Sq. ft.
Minimum Room Size	88 Sq. ft.
Compressor	Twin-Rotary
Dimensions (WDH)	38-1/2 in x 16-1/2 in x 31-5/8 in
Weight (lbs)	119.0


Compatible Indoor Air Handler Units

RT009GLSILCFHG (9K)	RT012GLSILCFHG (12K)
RT018GLSILCFHG (18K)	
Quantity	3 (Up to 36,000 BTU)
Max Circuit Length	80 ft. (9K) / 100 ft. (12K/18K)
Max Vertical Run	33 ft. (9K/12K/18K)
Adjustment Charge	0.11 oz x (L1+L2+L3-75 ft.)

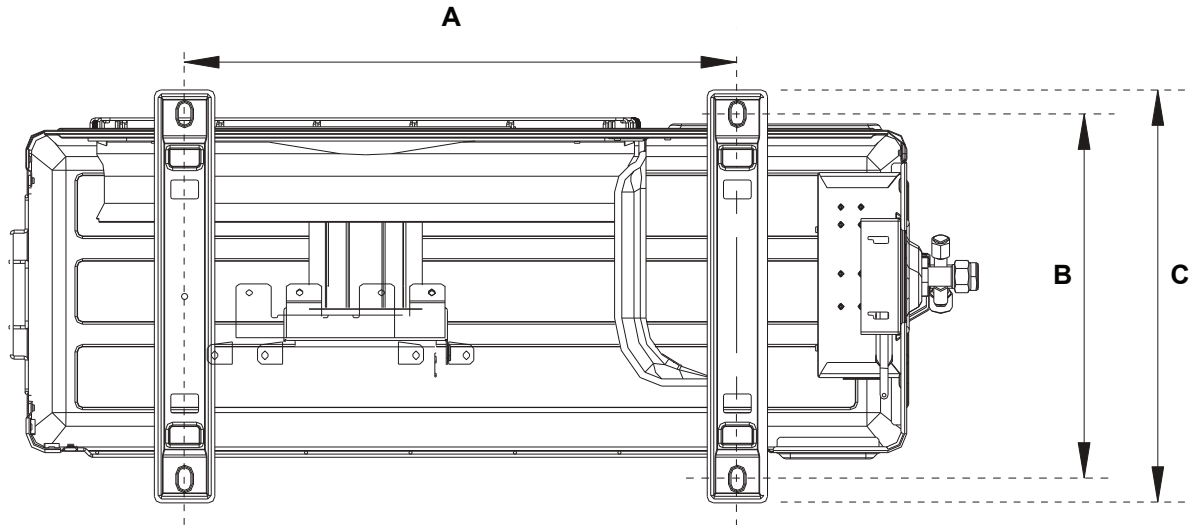


Model	A	B	C	D	E
YN030GLSI24M3G (27,000 BTU / 3-Zone)	23-7/8 in	15-3/8 in	16-5/8 in	38-1/2 in	31-5/8 in
	607 mm	390 mm	421 mm	978 mm	803 mm

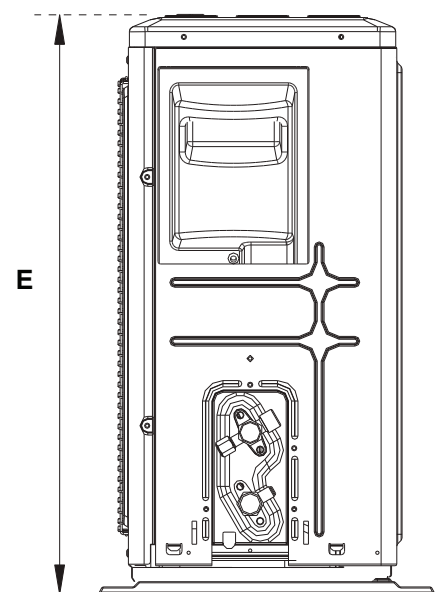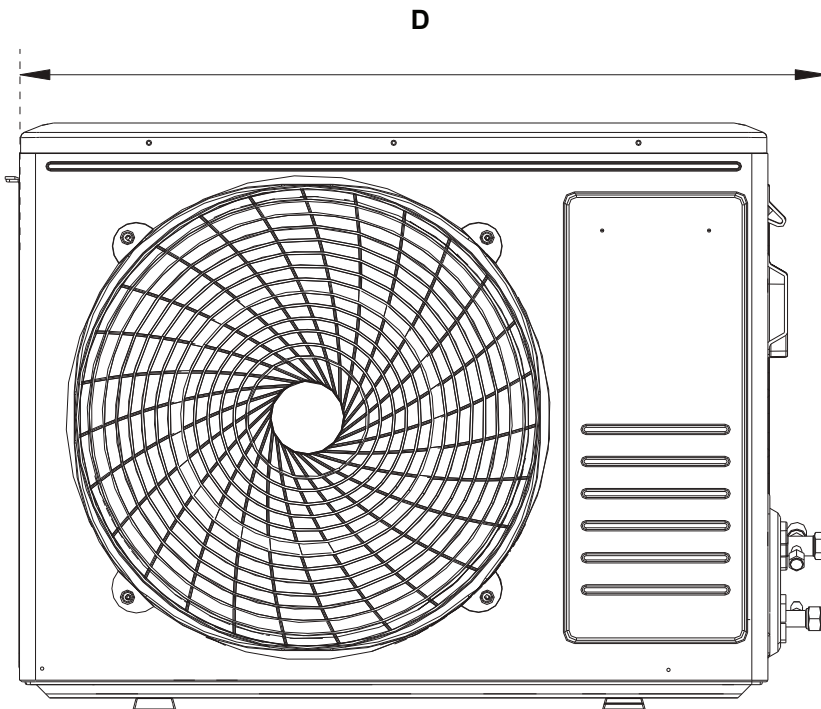


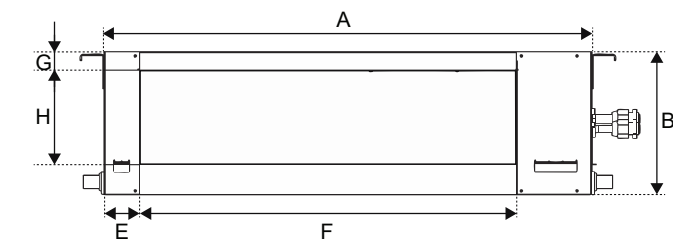


Supply Side

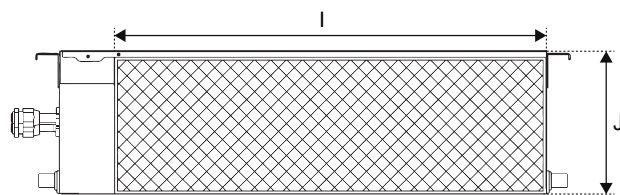


Inlet Side

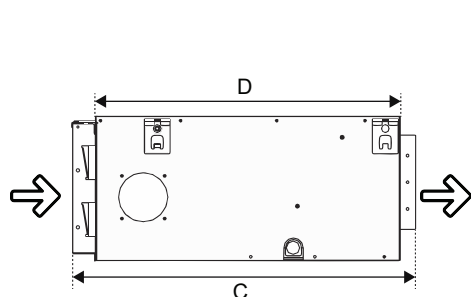

Side View

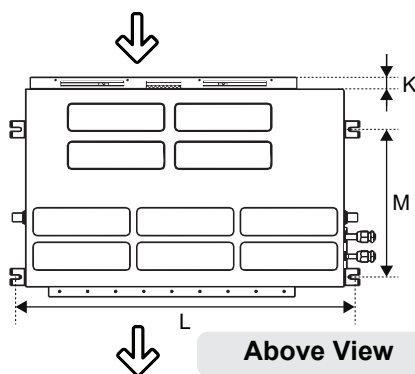


Above View

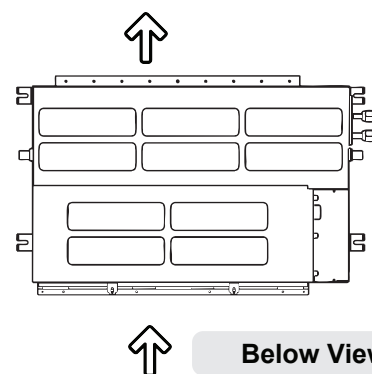


Below View

Overall Air Handler Dimensions				Front Side Air Outlet (Supply)				Rear Side Air Inlet (Return)			Mounting Brackets	
A	B	C	D	E	F	G	H	I	J	K	L	M
27-5/8 in	7-7/8 in	19-3/8 in	17-3/4 in	1-3/4 in	20-1/8 in	1/8 in	5-1/2 in	23-5/8 in	7-3/8 in	1-3/8 in	29-1/8 in	11-3/4 in
701.7 mm	200 mm	492.1 mm	450.9 mm	44.5 mm	511.2 mm	3.2 mm	139.7 mm	600.1 mm	187.3 mm	34.9 mm	739.8 mm	298.5 mm

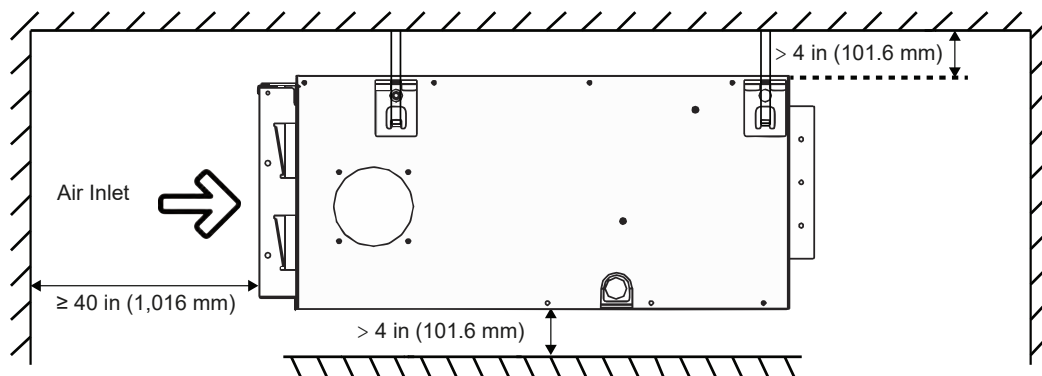


Side View

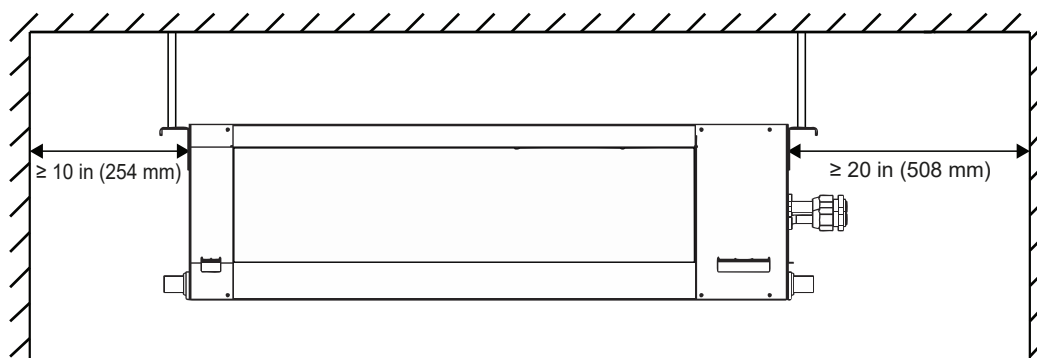


Front View


RT012GLSILCFHG Air Handler Dimensional Data

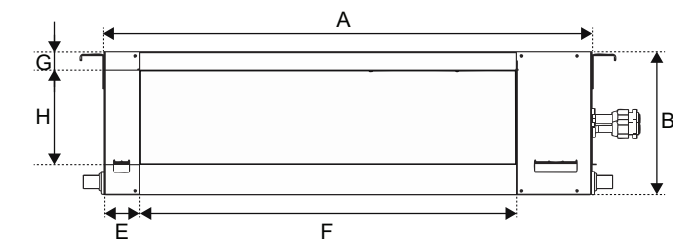


Supply Side

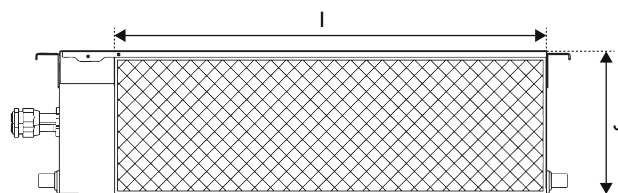


Inlet Side

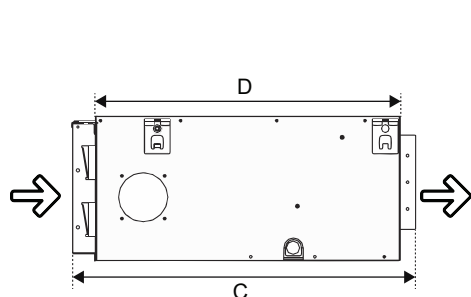

Side View

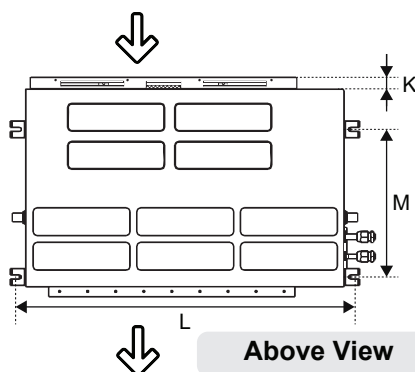


Above View

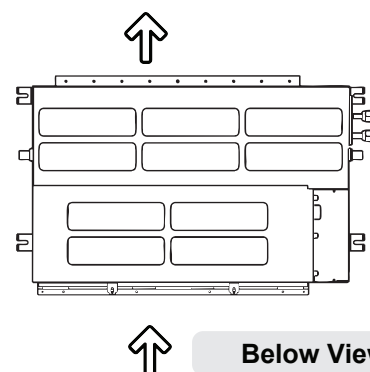


Below View


Overall Air Handler Dimensions				Front Side Air Outlet (Supply)				Rear Side Air Inlet (Return)			Mounting Brackets	
A	B	C	D	E	F	G	H	I	J	K	L	M
27-5/8 in	7-7/8 in	19-3/8 in	17-3/4 in	1-3/4 in	20-1/8 in	1/8 in	5-1/2 in	23-5/8 in	7-3/8 in	1-3/8 in	29-1/8 in	11-3/4 in
701.7 mm	200 mm	492.1 mm	450.9 mm	44.5 mm	511.2 mm	3.2 mm	139.7 mm	600.1 mm	187.3 mm	34.9 mm	739.8 mm	298.5 mm

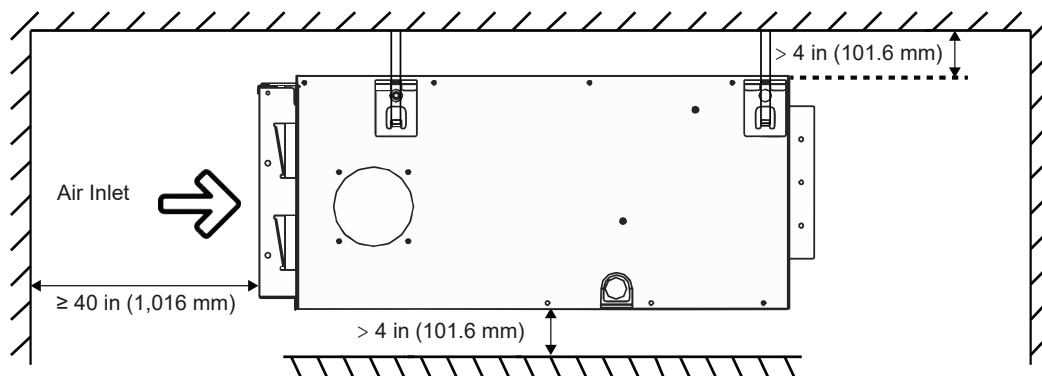


Side View

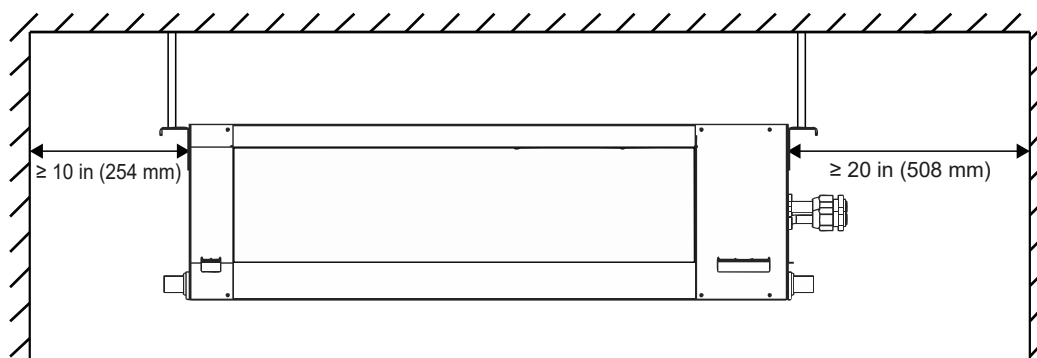


Front View

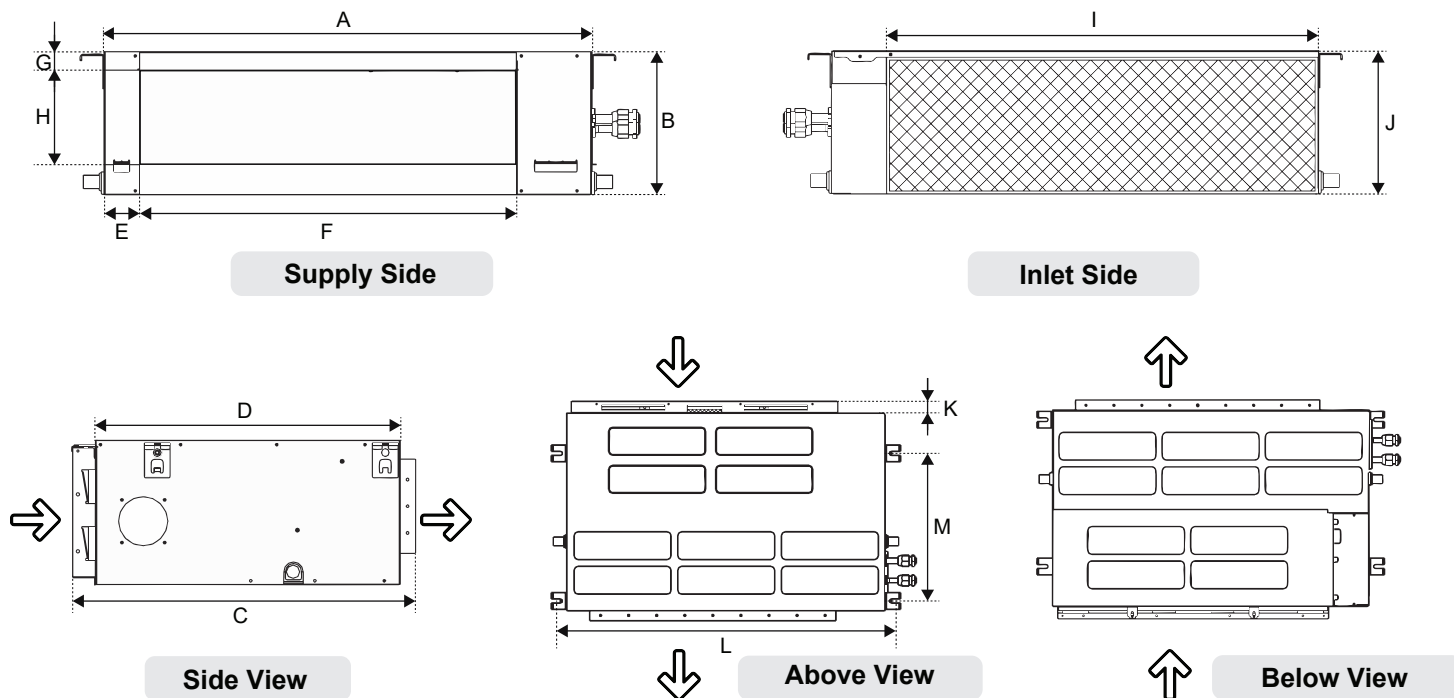

Overall Air Handler Dimensions				Front Side Air Outlet (Supply)				Rear Side Air Inlet (Return)			Mounting Brackets	
A	B	C	D	E	F	G	H	I	J	K	L	M
36-1/4 in	7-7/8 in	19-3/8 in	17-3/4 in	1-3/4 in	28-3/4 in	1/8 in	5-1/2 in	32-1/4 in	7-3/8 in	1-3/8 in	37-3/4 in	11-3/4 in
920.8 mm	200 mm	492.1 mm	450.9 mm	44.5 mm	730.3 mm	3.2 mm	139.7 mm	819.2 mm	187.3 mm	34.9 mm	958.9 mm	298.5 mm

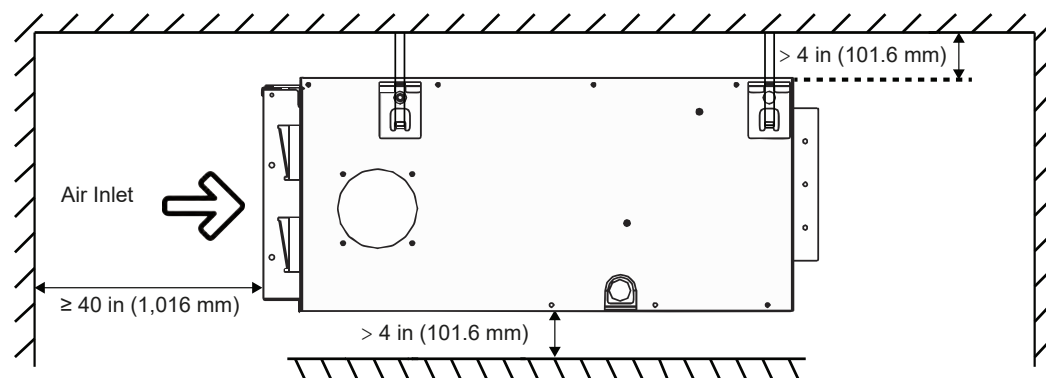

Side View

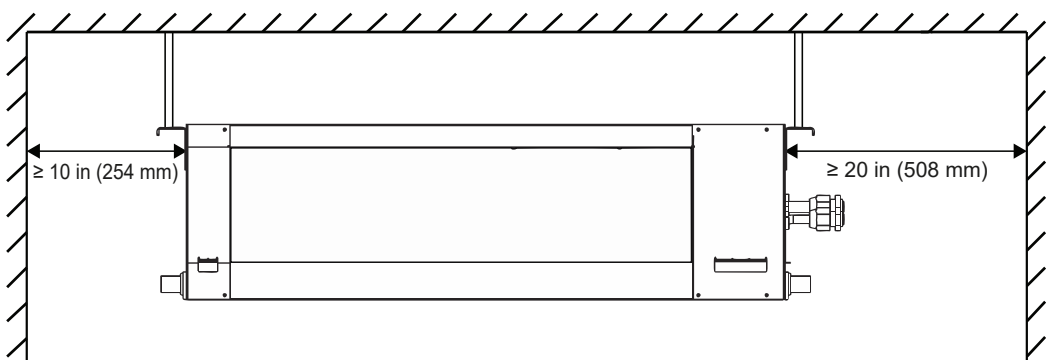

Front View

RT009GLSILCFHG (Air Handler) Specifications

Airflow Rate (cfm)	335(Turbo)/305(Hi)/276(Med)/182(Lo)/182(Mute)
Sound Level (dBA)	42 (Turbo) / 39 (Hi) / 34 (Med) / 28 (Lo) / 28 (Mute)
Auto Air Circulation	2-Way Louver (Up-Down + Left-Right)
Dimensions (WDH)	27-1/2 in x 19-1/4 in x 7-1/8 in
Weight (lbs)	33.1

RT012GLSILCFHG (Air Handler) Specifications

Airflow Rate (cfm)	360(Turbo)/330(Hi)/270(Med)/210(Lo)/180(Mute)
Sound Level (dBA)	44 (Turbo) / 41 (Hi) / 35 (Med) / 33 (Lo) / 32 (Mute)
Auto Air Circulation	2-Way Louver (Up-Down + Left-Right)
Dimensions (WDH)	27-1/2 in x 19-1/4 in x 7-1/8 in
Weight (lbs)	33.1

RT018GLSILCFHG (Air Handler) Specifications

Airflow Rate (cfm)	500(Turbo)/426(Hi)/370(Med)/300(Lo)/283(Mute)
Sound Level (dBA)	48 (Turbo) / 44 (Hi) / 41 (Med) / 36 (Lo) / 33 (Mute)
Auto Air Circulation	2-Way Louver (Up-Down + Left-Right)
Dimensions (WDH)	35-1/2 in x 19-1/4 in x 7-7/8 in
Weight (lbs)	39.7

Matching Table (# Circuits Utilized)

2-Circuits	(9000-24000) + (9000-18000)
3-Circuits	(9000-18000) + (9000-12000) + (9000-12000)

Piping Diameters

9000 BTU	1/4 in (Liquid) - 3/8 in (Suction)
12000 BTU	1/4 in (Liquid) - 3/8 in (Suction)
18000 BTU	1/4 in (Liquid) - 1/2 in Adapter Required (Suction)
(All Necessary Adapters Provided with Condenser)	

Although very seldom, if the total demand from the combined group of indoor units' exceeds the rated capacity of the outdoor unit, the capacity of each indoor unit will be annotated accordingly.

Every indoor unit attached to a multi zone system will operate at a random, self regulated capacity, based on the actual demand it measures from the zone it is serving (Between 30% to 100% of its rated capacity) or turn off as needed.

Warranty Information and Length

Complete warranty details are available with the vendor or online at <https://www.pdhvac.com/support/warranty/>. This high quality system is eligible for up to **10** years limited warranty on the compressor, and **7** years on other internal parts. To qualify for this warranty, the system must be installed within 90 days by a registered technician. All other installations that are registered default to **5** years parts/compressor. Products unregistered qualify for only **1** year parts/compressor warranty.



Outstanding Features

- LED Display
- Energy Saving
- Ultra-Thin Design
- Dual Drain Options
- Customizable Timer
- Eco-Friendly Refrigerant
- Whisper-Quiet Operation
- Power Loss Memory Recovery



Available Accessories

Part Number	Description
IKT-LCVR4P-KIT	Decorative PVC Line Cover Kit
IKT-LNBR-1/4-3/8	BendAid Flexible Easy Bender Kit
BRK-FRM-C-2P	Folding Mounting Bracket w/ Leveler
IKT-UVL32UL-AG	UVC Bacterial Disinfection Kit
IKT-SURPRK-DV2	Ultimate Surge and Power Protection